

■ **MENU**

● **SMD LED Ribbon (SC-ID)**

Flexible LED Strip
Top SMD LED type



■ **Indhold/Contents**


■ **Kontakt/Contact**

■ **Farve koordinater /Color Coordinates**

Applikation

1. Cove lighting
2. Architectural lights for canopy, corridor, window, archway
3. Backlight or edge lighting for signals
4. DIY lights for home use
5. Path and contour marking
6. Decorative lights for holiday, event, show, exhibition

Model Number	Color	Length (m)	LED Q'ty	LED Type	Light Output (mcd)	Light Output (lumen)	Beam Angle (degrees)	Voltage (V DC)	Current (Amps)	Max. Power Consumption (W)	Continuous Connection (m)
SC-ID-R		5	300	Top SMD LED 3528(2012)	300x600	450	120	12	1.7-2	24	15
SC-ID-Y		5	300		300x600	450	120	12	1.7-2	24	15
SC-ID-B		5	300		300x250	300	120	12	1.7-2	24	15
SC-ID-G		5	300		300x650	500	120	12	1.7-2	24	15
SC-ID-W		5	300		300x1200	600	120	12	1.7-2	24	15
SC-ID-WW		5	300		300x850	450	120	12	1.7-2	24	15
SC-ID-RGB		5	150	Top SMD	150x1500	625	120	12	2.6-3	36	10
		5	300	LED 5060	300x1500	1250	120	12	5.1-6.0	72	8

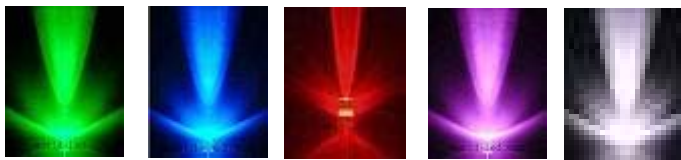


Power Incentive

■ MENU

- SMD LED Ribbon (SC-ID)

Dimension drawing

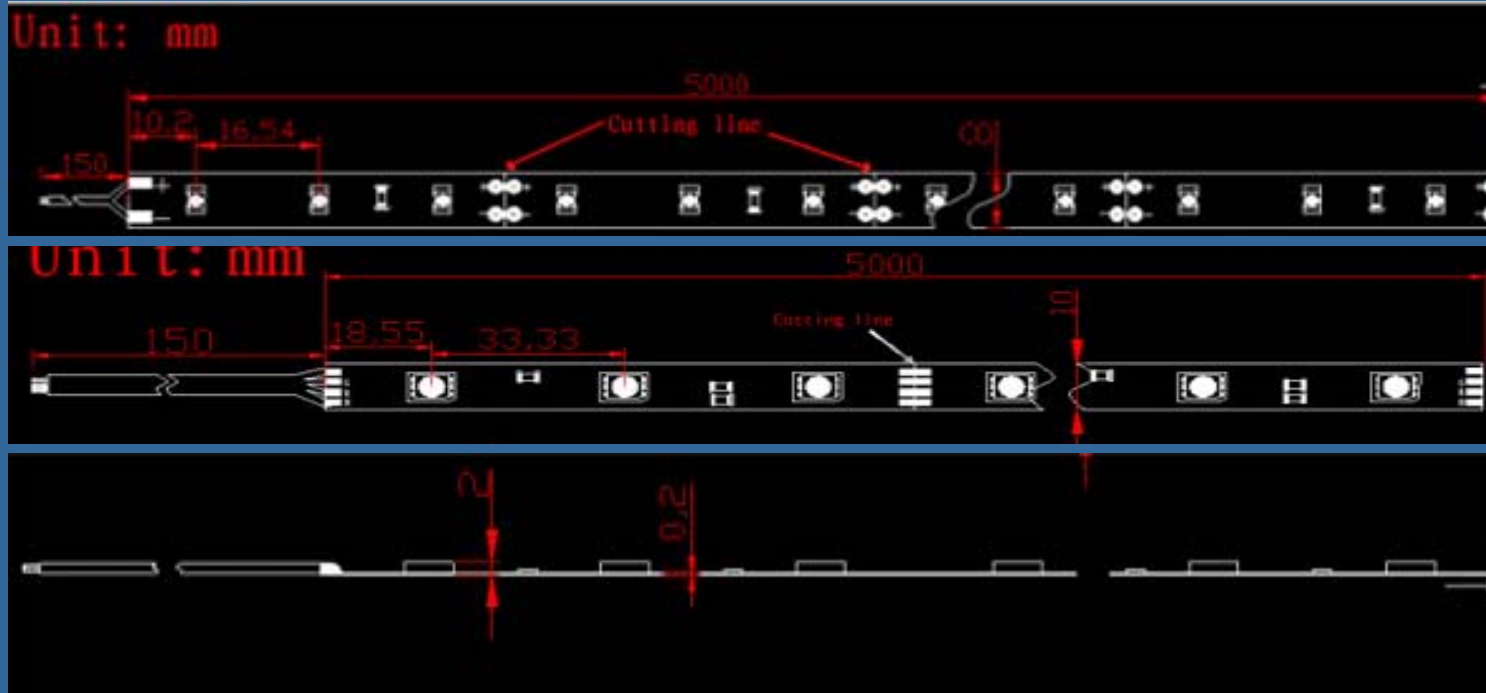

■ Indhold/Contents

■ Kontakt/Contact

■ Farve koordinater /Color Coordinates

7.

Power Incentive

Power Incentive

Tel: +45 4818 9588 Fax: +45 4818 9589

E-mail: sales@powerincentive.dk



Power Incentive

■ MENU

● SMD LED Ribbon (SC-ID) Flexible LED Strip – Top SMD LED

Assembly Information

- Solder connection should only be performed on designated solder pads (marked " +/-"). During soldering, do not exceed the maximum soldering time of 10 seconds and the maximum soldering temperature of 260 Celsius degrees.
- The smallest unit (50mm or 100mm - 3 LEDs) can be removed by cutting with scissors between the designated solder pads.
- The mounting of the strip is facilitated by means of the double-sided adhesive on the back-surface of the strip. Care must be taken to provide a clean and dry mounting surface, free of oils or silicone coatings as well as dirt particle. The mounting substrate must have sufficient structural integrity. Take care to completely remove the adhesive backing. Once the strip is appropriately positioned. Press on the strip with about 20N/cm² (refer to application techniques of 3M adhesive transfer tapes).
- The minimum bending radius is 2 cm. The strip may be bent over a smaller radius of the circuit board containing no electronic components and such bends should be made once and fixed in position to avoid cyclic fatigue.

Safety Information

- The strip itself and all its components may not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- Installation of LED modules (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
- Correct electrical polarity needs to be observed. Wrong polarity may destroy the strip.
- Parallel connection is highly recommended as safe electrical operation mode.
- Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the strip.
- Please ensure that the power supply is of adapters power to operate the total load.
- When mounting on metallic or otherwise conductive surfaces, there needs to be an electrical isolation points between strip and the mounting surface.
- Pay attention to standard ESD precautions when installing the strip.
- Damaged by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.

After cutting along the line, if you want to connect the cutting sections or connect one section to power, the connectors will be necessary. 1. Connector of strip to strip 2. Connector of strip to power.

■ Indhold/Contents

■ Kontakt/Contact

■ Farve koordinater /Color Coordinates



SC-ID.pdf



**SC-ID-
RGB.pdf**



Power Incentive

Power Incentive, Hammerensgade 1, DK-1267 Copenhagen K.
Tel: +45 4818 9588 Fax: +45 4818 9589
E-mail: sales@powerincentive.dk